



LQ-ET7153

COMPACT FLOODLIGHT RANGE

LQ-ET7153.15 / .24 / .36
.50 / .2050

Five precision beam options for exterior accent lighting.


PRODUCT DESCRIPTION

- Stainless steel housing.
- Adjustable projection angle.
- Ultra white tempered glass.
- High efficiency PMMA lens.
- 20-year availability guarantee for lamp holder parts.

KEY DESIGN PRINCIPLES

- Lamp holder parts can adjust vertical direction of 180° Angle.
- Can be installed in harsh environments.
- Exquisite brushed housing surface.
- The external screws and mounting brackets are made of stainless steel.
- Five distributions: two medium beams, two wide beams and one spread beam.

PHOTOMETRIC DATA

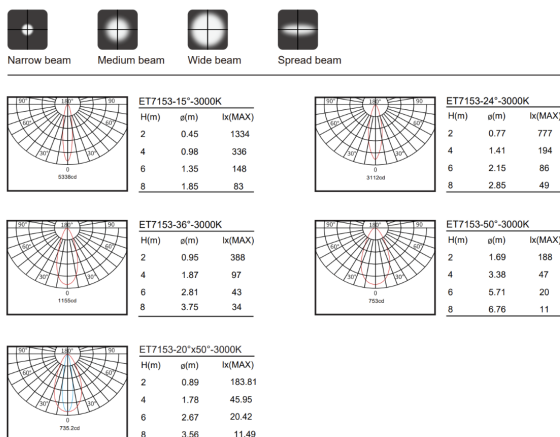

PRODUCT RANGE

MODELS

- LQ-ET7153.15.30K - Medium beam 15°
- LQ-ET7153.24.30K - Medium beam 24°
- LQ-ET7153.36.30K - Wide beam 36°
- LQ-ET7153.50.30K - Wide beam 50°
- LQ-ET7153.2050.30K - Spread beam 20°x50°

CONSTRUCTION

Stainless steel housing | Tempered glass | PMMA lens
Adjustable stainless steel mounting bracket


CERTIFICATIONS & PERFORMANCE



6W

IP68 | IK06
Operating range: -20°C to 50°C
Cable length: 0.5m | Weight: 1.2kg

DIMENSIONS & INSTALLATION

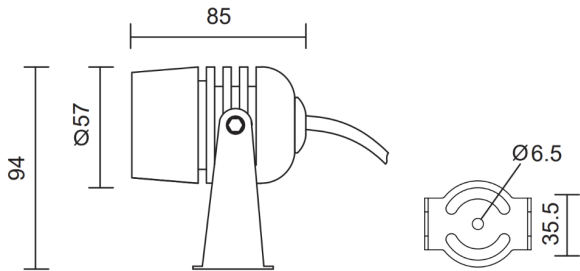

Dimensions in mm: Ø57 / 85 / 94; cable Ø6.5; bracket detail 35.5.

PRODUCT VIEWS



TECHNICAL DATA

Model	CCT	β	Luminous flux	Control	SDCM	CRI	LED	Voltage
LQ-ET7153.15.30K	3000K	15°	383lm	ON/OFF	< 3	> 80	COBx1	24VDC
LQ-ET7153.24.30K	3000K	24°	434lm	ON/OFF	< 3	> 80	COBx1	24VDC
LQ-ET7153.36.30K	3000K	36°	425lm	ON/OFF	< 3	> 80	COBx1	24VDC
LQ-ET7153.50.30K	3000K	50°	402lm	ON/OFF	< 3	> 80	COBx1	24VDC
LQ-ET7153.2050.30K	3000K	20°x50°	310.93lm	ON/OFF	< 3	> 80	COBx1	24VDC

OPTIONS

2700K

3000K

4000K

5000K

BK
RAL9011

GR
RAL7012

WH
RAL9016

SS

Other options available for consultation.

NOTES

- Standard colour temperature shown: 3000K; options shown: 2700K / 3000K / 4000K / 5000K.
- Finish options shown: BK RAL9011 / GR RAL7012 / WH RAL9016 / SS.
- Standard control: ON/OFF.
- All photometric diagrams and lux-distance values correspond to the source product data.